

CS0032 (1/3M1)

Technical Datasheet



Features

- Cable connection for powering military devices


Applications

- Covert operations
- Homeland Security
- Surveillance

Technical Specifications

| | |
|-----------------------------------|---|
| Part No. | CS0032 |
| NSN | 6135-99-225-7255 |
| Voltage Range | 10.5 to 14.4V |
| Average Voltage | 11 to 12V |
| Nominal Capacity | 80Ah |
| Max. Discharge | 5.0A continuous |
| Pulse Capability | N/A |
| Weight | 3.3kg max. |
| Operating Temperature | 0°C to 40°C |
| Storage Temperature | -32°C to 70°C |
| Exterior/Housing | Moulded ABS case |
| Terminals/Connector | Amphenol 629B-56T-08-33-SN |
| Safety | Polyswitch Material Safety Datasheet - MSDS095 Safety Guide UBM-5135 |
| Transportation | Class 9 - U.S. and International (see note) |
| Export License | ECCN 3A611.x export license required to export from U.S. |
| Harmonized Tariff Schedule | 8506.50.0000 |
| Note | A complete description of transportation regulations, lithium weights and transportation classifications is available on the Ultralife website. |

Dimensions

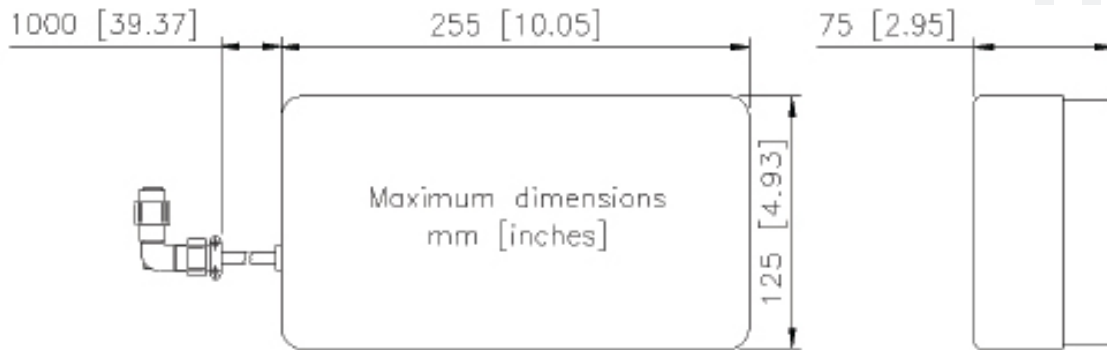

Performance Graphs

